


# Covering Machine

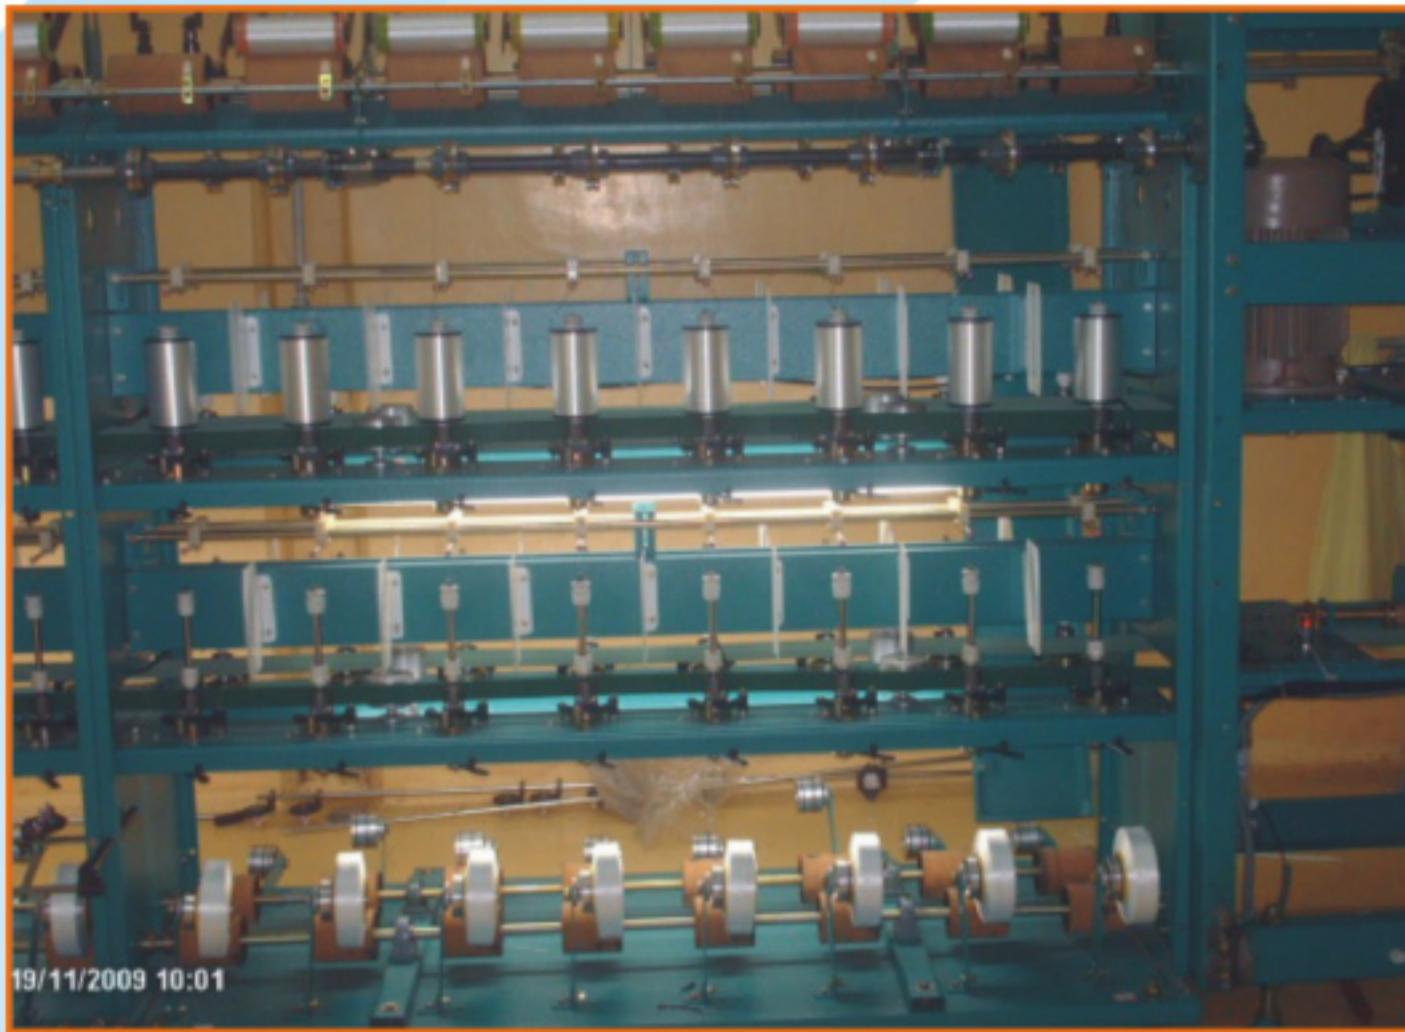


## Technical Specifications

GENERAL DATA	
COVERING TYPE	Double
SPINDLE GAUGE	225
MAX. WORK SPEED	16000
WHARVE DIAMETER	25
SPINDLE DRIVE	Tangential belt
TWIST RANGE	150 - 4500 tpm
TYPE OF FEEDING PACKAGE	
COVERING YARN	Flanged bobbin type
CORE YARN	Bobbin width-115 max. or cone dia 220 mm.
TAKE UP	
NO. OF DECKS	02
MAX. BOBBIN DIAMETER	180
TRAVERSE LENGTH	152 mm.
TUBE LENGTH	172 mm.
CYLINDER TUBE DIAMETER	63 mm.
MAX. SPEED OF TAKE-UP	60 m / min.
FRAME	
SECTION LENGTH	1830
MACHINE WIDTH	800
MACHINE HEIGHT	1800

## Double Deck Machines for Covering of Elastic Yarns / Glass Fibre Yarn

- The machines, built to fit hollowed spindles, are equipped with a high sophisticated traverse, tapering device & lip motion device, such to take-up even packages to be used directly in hosiery without prior rewinding.
- The take-up cradle is of the "open arm" type, with centering running on ball bearings.
- Different types of control can be equipped the machines from fully mechanical to full electronic system.

## Dimensions

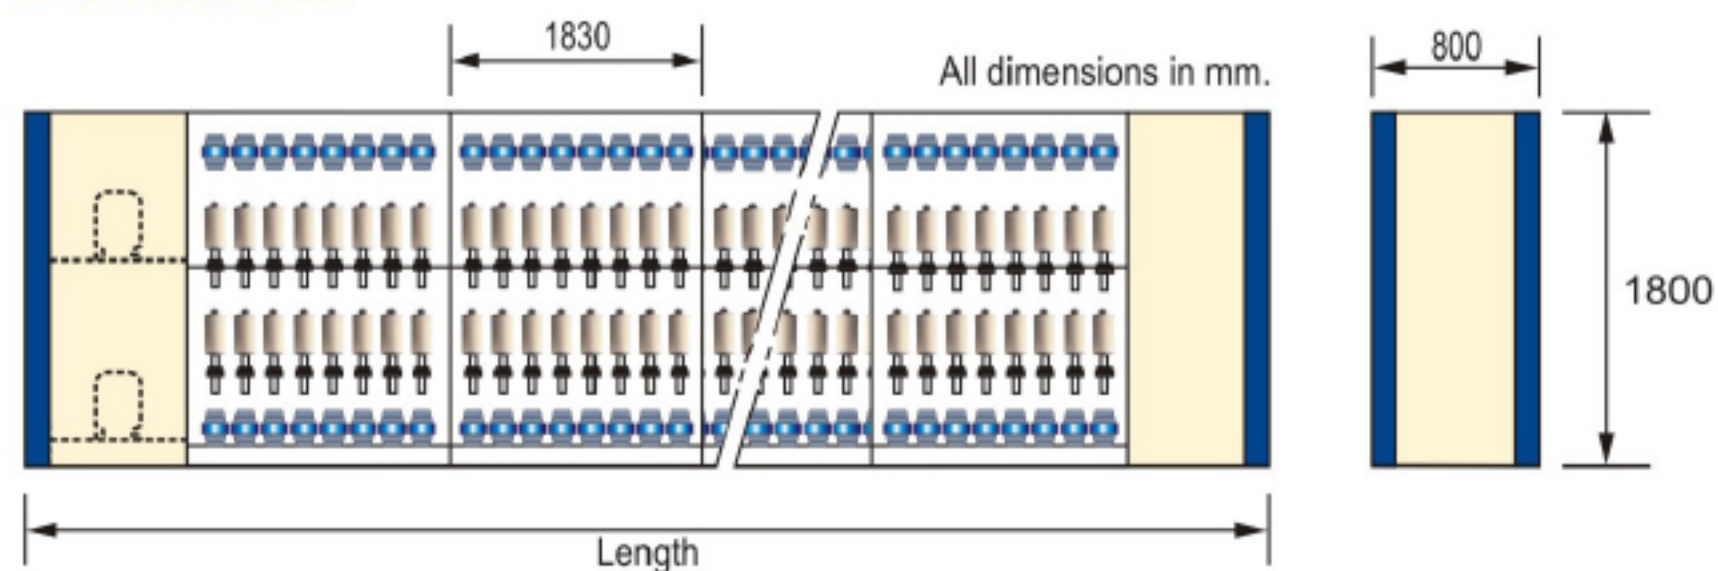

NO. OF SECTIONS	10	11	12	13	
NO. OF SPINDLES	320	352	384	416	Height
LENGTH-METER	20.15	21.98	23.81	25.64	2.1
LENGTH-FEET	66'2"	72'2"	78'2"	84'2"	6'10"